




B = final flush with shock-absorbing soil (7300) (usually synthetic surface)  
C = in natural soils with shock absorption (8300) (typically loose bulk material)  
The maximum free fall height is 1500



The chain must be demounted without a load (with sag) is suspended and can not be cut.

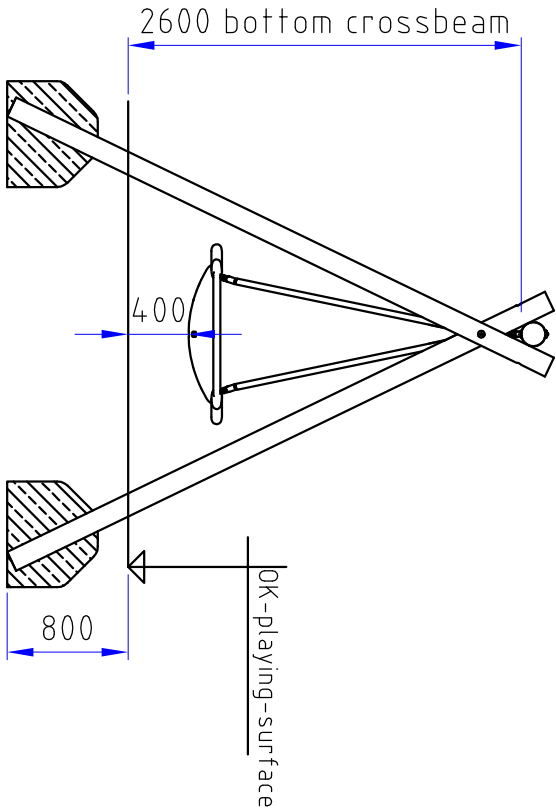

Sol souple 21,2m² HCL 2,20m  
Espace de Circulation 34,4m² HCL 0m  
Espace de Circulation 55,6m²

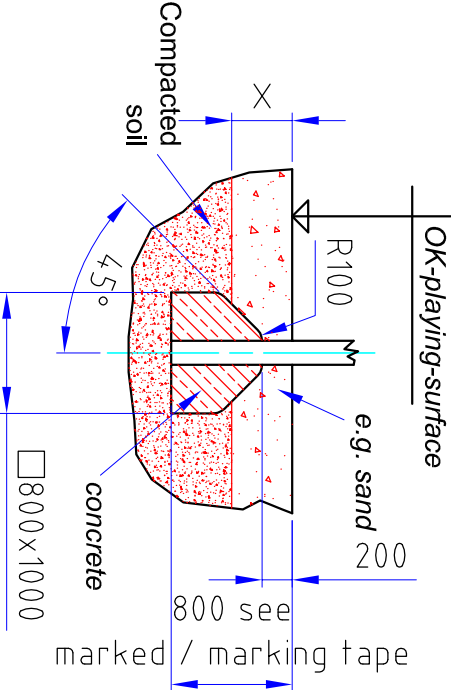

Concrete quality C20/25 F 1 (0-16)  
concrete-soil moisture tramp  
Foundation head round  
X = The corresponding thickness to take the attached sheet "Condition of the impact area"  
Foundation-holes = 800 mm deep;

FHS Holztechnik GmbH		DIN 7168		Oberfläche		Maßstab		1:50		Position		-		Menge		-	
Freizeit- und Spielgeräte		<del>klein</del> mittel <del>groß</del>						-				-					
Niedermerfeld 23																	
59823 Arnsberg																	
Telefon: 02931/9620-0																	
Telefax: 02931/9620-50/51																	
E-Mail: info@fhs-holztechnik.de																	
Internet: www.fhs-holztechnik.de																	